


**Professional Digital Multimeters  
Digital AC, AC/DC Clamp Meters  
Electrical Testers  
Insulation Testers**



EMC & LVD  
EN: 61326  
EN: 61010-1, EN: 61010-02-031

Model 961 (P97)

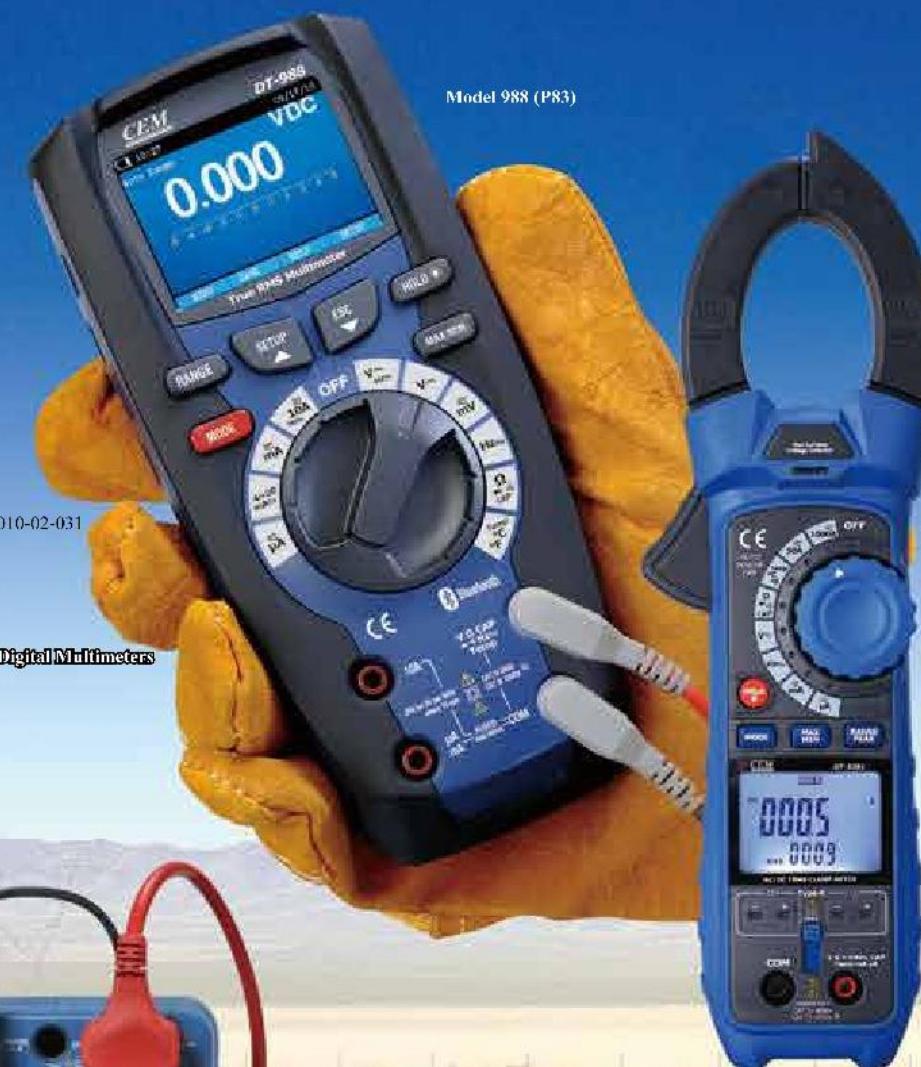


Model 9382 (P117)



# DT-3360/3361/3363/3366/3367/3368

## 1000A AC, AC/DC Clamp Meters

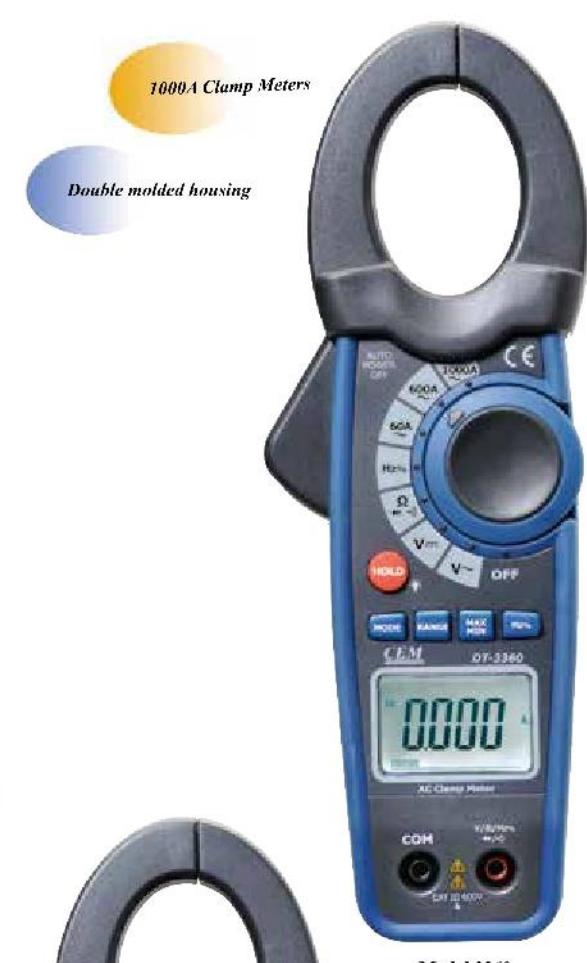

Model 3360



Model 3368

**Specifications**

Function	Max Range	Basic Accuracy	Max. Resolution	3360	3361	3363	3367	3366	3368
DC Current	1000A	-(2.5%+5d)	1mA		*	*		*	
AC Current	1000A	-(3.0%+4d)	10mA	*	*	*	*	*	*
DC Voltage	600V	-(0.8%+2d)	0.1mV	*	*	*	*	*	*
AC Voltage	600V	-(1.0%+4d)	0.1mV	*	*	*	*	*	*
Resistance	60MΩ	-(1.0%+4d)	0.1Ω	*	*	*	*	66MΩ	66MΩ
Capacitance	4000μF	-(3.0%+5d)	0.01nF	*	*	*	*	40mF	40mF
Frequency	10MHz	+(1.2%+3d)	0.001Hz	*	*	*	*	10kHz	10kHz
Duty Cycle	99.9%	-(1.2%+3d)	0.1%	*	*	*	*	*	*
Temperature	1000°C/1832°F	-(3.0%+3d)	0.1°C/°F	*	*	*	*	*	*
Inrush current	1000A	0.1A	-(2.0%+5d)				*	*	
Continuity check				Threshold 40Ω, test current <0.5mA					
Diode test				Test current of 0.3mA typical, open circuit voltage <3V DC typical					

Size(HxWxD): 229mm x 80mm x 49mm

Weight: 303g

**Accessories:**

Test leads, gift box with carrying case, 9V battery,  
Temperature probe(3361/3363/3367/3366/3368)

# DT-3350/3351/3352


1500A AC/DC True RMS Clamp Meters with Inrush Current Function

- 1500A True RMS
- 40000 Counts(3351/3352)

- Peak Hold Function
- Inrush current measurement



EMC & LVD  
EN: 61326  
EN: 61010-1,  
EN: 61010-02-031

**Features**

	3350	3351	3352
Current measurement	AC/DC	AC/DC	AC/DC
Power clamp meter			*
LCD display counts	6600	40000	40000
AC True RMS	*	*	*
Display with backlight	*	*	*
Inrush current measurement	*	*	*
Max/Min, Data Hold	*	*	*
RFL(Zero) Function	*	*	*
Auto Power Off	*	*	*
Low battery indication	*	*	*
Analog Bargraph / 41 seg.	*	*	*
2.16" (55mm) Jaw opening	*	*	*
NCV Detection	*	*	*



Model 3351



Model 3350

**Specifications**

Function	Max Range	Basic Accuracy	3350	3351	3352
Current DC	1500A	±(2.0%+10d)	*	*	*
Current AC	1500A	±(2.8%+10d)	*	*	*
AC kW/kVA	900.0kW	±(3.0%+10d)			*
(AC kW/kVA TRMS 0-600V, 0-1500A, 50/60Hz)					
DC kW/kVA	900.0kW	±(2.5%+10d)			*
(DC kW/kVA 0-600V, 0-1500A, 50/60Hz)					
Power Factor	0.3~1	±(2.5%+10d)			*
Voltage DC	1000.0V	±(0.1%+5d)	1000V	*	*
Voltage AC	750.0V	±(0.5%+5d)	750V	*	*
Resistance	40.000MΩ	+(0.5%+4d)	*	*	*
Temperature	1000°C/ 1832°F	±(1.0%+1°C/1°F)	*	*	*
Capacitance	40.00mF	±(2.5%+5d)	*	*	*
Duty Cycle	10.0 to 95.0%	+(0.5%+2d)	*	*	*
Frequency	40.000MHz	±(1.2%+2d)	*	*	*
Inrush Current	1500A	±(1.5%+2d)	*	*	*
Continuity check		Buzzer sounds at 50Ω			
Diode test		Test current 0.3mA			

Size(HxWxD): 295mm x 100mm x 46mm

Weight: 537g

**Accessories:**

Test leads, gift box with carrying case and 9V battery,  
Temperature probe.

